



MISC. DOOR PARTS

Weatherstrip

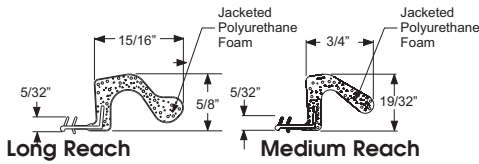


TT68LONGWSB (Bronze)
TT68REGWSB (Bronze)



TT68REGWSW (White)
TT30DRBTM


	Classic Craft & Wood Doors	Fiberglass & Steel Doors
Strike Jamb	long reach	long reach
Hinge Jamb	medium reach	long reach
Head Jamb	medium reach	long reach

Adjustable Security Strike Plate
Jamb Astragal/Mullion




TTADJSTRIKEJMB **TTADJSTRIKEAST**


Combination Storm Door Adaptor

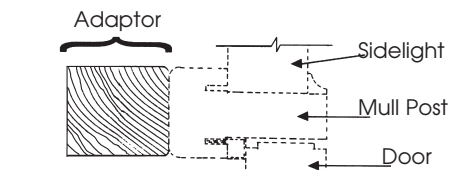

TT STORM DR458
4-9/16" Wall
1-0 x 3-0 x 1-0
1-0 x 3-0

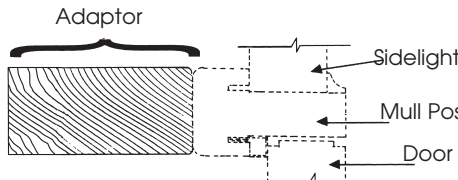


TT STORM DR658
6-9/16" Wall
1-0 x 3-0

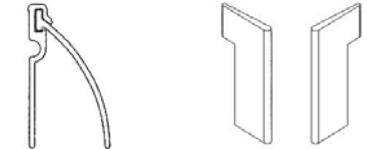


RAIN DEFLECTOR **TTCORNERSEAL**

Dura-Plast Composite Jamb

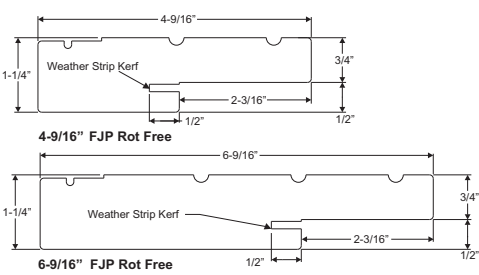


- Options:**
- Primed Composite
 - Pre-finished white

Standard Self-Aligning Hinge (with Security Tab)




- | | | |
|-------|--------|-------------------|
| 4 x 4 | YZ | Lite Brass |
| 4 x 4 | US15 | Satin Nickel |
| 4 x 4 | US 10B | Oil Rubbed Bronze |

UL Listed Spring Hinge

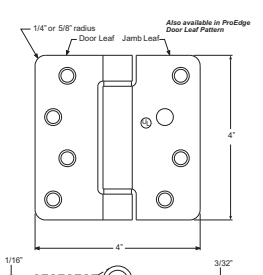


- | | | |
|-------|------|--------------|
| 4 x 4 | YZ | Lite Brass |
| 4 x 4 | US15 | Satin Nickel |

Self Aligning NRP (Riveted) Pin Hinge



- | | | |
|-------|----|------------|
| 4 x 4 | YZ | Lite Brass |
|-------|----|------------|

Entrance Door and Patio Door Slope Sill Pan

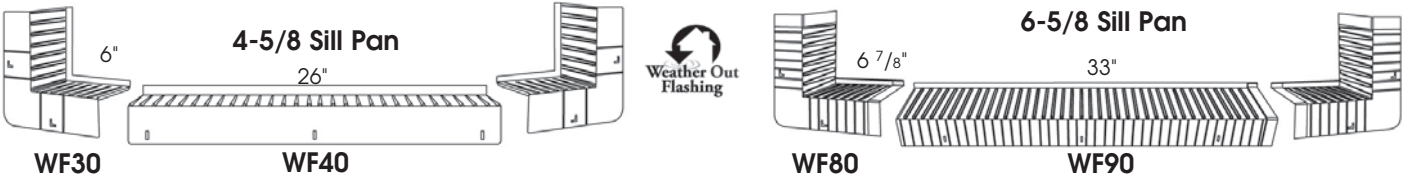

Order any of 2 ways:
1- To be included w/any exterior door unit or patio unit.


2- **As a kit only** **Specify** **CODE= SP**
• Door Unit Width • Wall Thickness

Reason to use:

- Required by most door MFG's to validate their MFG warranties
- ASTM required
- Paragraphs "R703.8 Flashing in the 2006 International Building Code
- Easiest to install
- Does NOT require glue or cement
- Can be installed in cold and wet conditions
- Helps in the prevention of mold
- Easily fits any width opening
- Created by a builder for builders

Key Features:


- Reduced skill requirements - very simple to use
- Green building products - uses recycled materials
- Built-in patented drain channels control water to outside (patent #7059087)
- Durable and flexible
- Allows for shimming
- Least intrusive on installing interior trim
- Size allows it to fold under house wrap

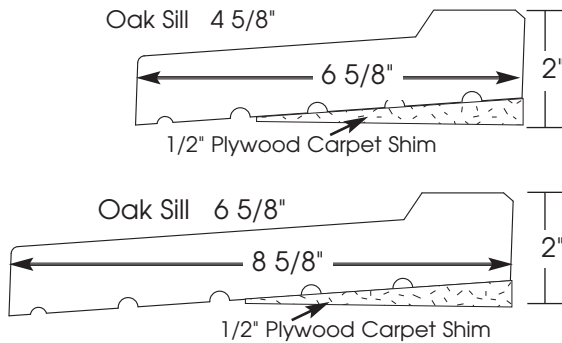


Therma-Tru Sill Profile

Inswing Sill/Woodgrain Cap
(Standard Feature on Jackson/Therma-Tru Door Units)


5-3/4" Tru-Defense Inswing

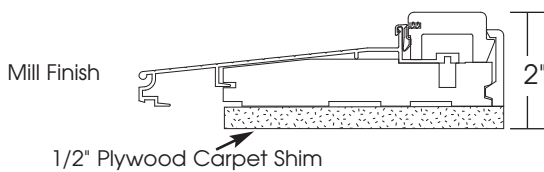

7-3/4" Tru-Defense Inswing

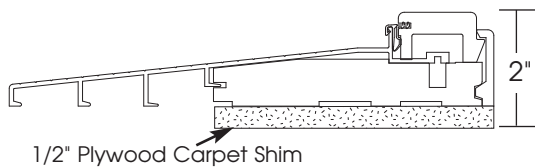


Aluminum Public Access Sill
(Mill Finish)

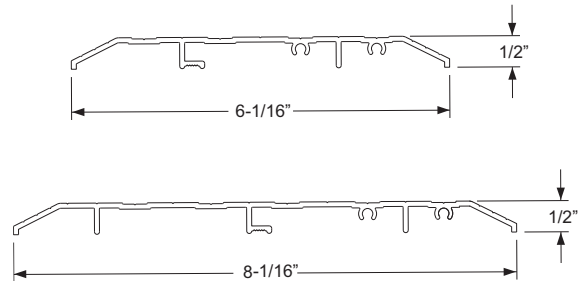

These are both inswing and outswing


Tru-Defense

Outswing sill w/wood grain cap

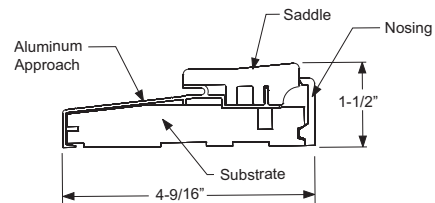


Therma-Tru standard hinge locations


Jackson machines all wood doors to match Therma-Tru specs

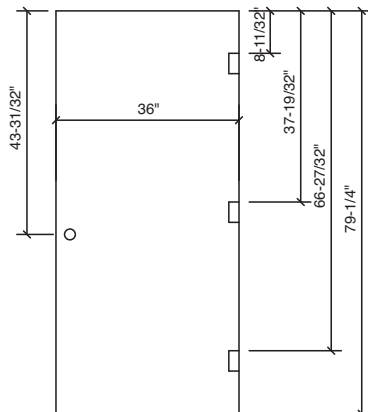

Therma-Tru frame size & hardware locations

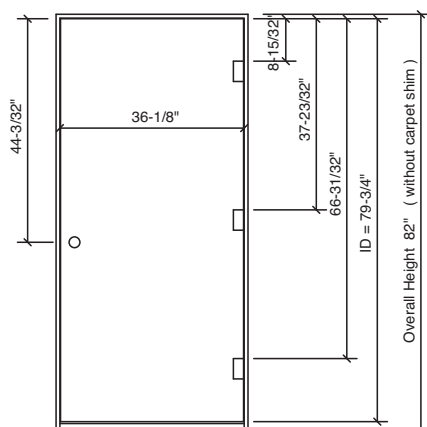


How to Determine Handing as Viewed from the Outside

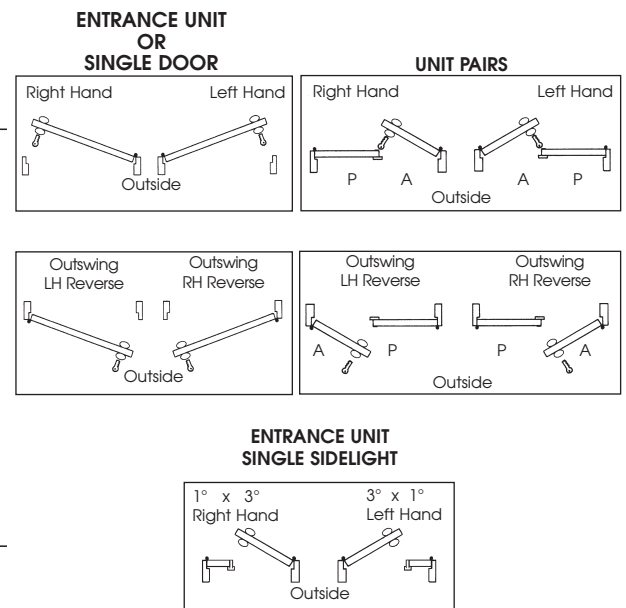


Exterior Casing Styles


WOOD OR PVC




908 Brickmould




5/4 Flat

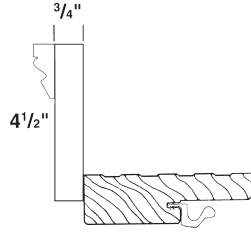


1 x 5 w/1 3/4 Band




PVCFLUTECAS34




PVCFLUTECAS1




908 Brickmould PVC w/J

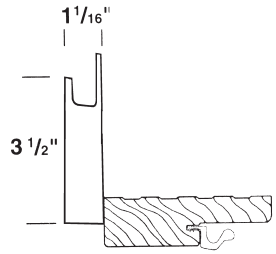


5/4 Flat PVC w/J



2590 BB PVC

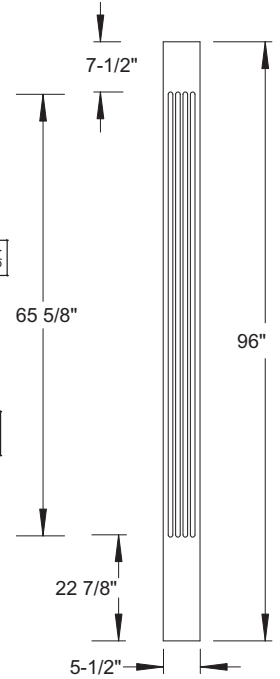


Entrance Trim Wood Only

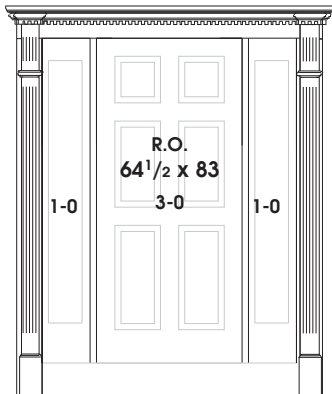

*JM-21

Style	Size	Head
JM-21	3-0	= JM21HD30
	1-0 x 3-0 x 1-0	= JM21HD103010
Casing,	6'-8"	= JM21FLT
Casing, Extended		= JM21FLTX


* JM21 Casing is Shipped Loose

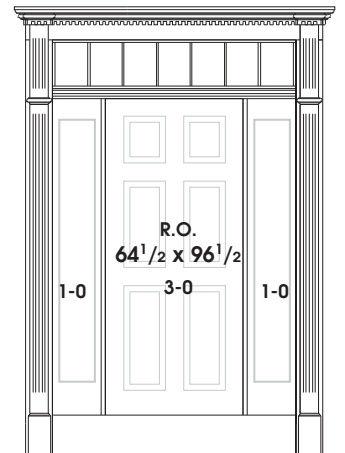

*JM21 w/Extended Legs

Vinyl Garage Door Transom

Stocked

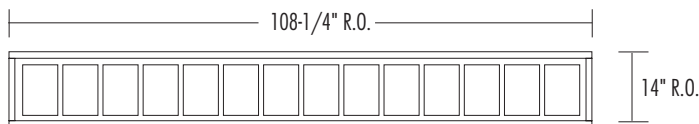

V GARAGE TRAN 14 LT

Features

- Low^E Glass
- J Channel
- GIA (Grille In Airspace)
- 3/4" Interior Receiver
- 4 5/8" and 6 5/8" Extension Jamb Available

Options

- 1 Lite Low^E