
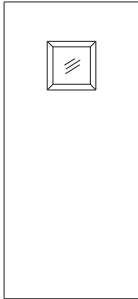
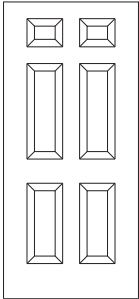
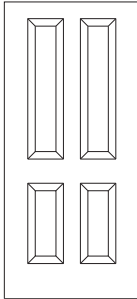
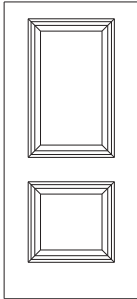
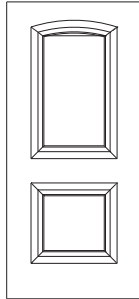


Therma-Tru Steel Edge Fire Door Features:


- 90 Minute Positive Pressure Fire Rating
- 24 Gauge Galvannealed Steel
- Primed Steel Surface
- Polyurethane Core
- Engineered Lock Block
- Steel Edge

					
Flush	Flush w/ 10" x 10" Vision Lite	6 Panel	4 Panel	2 Panel	2 Panel Soft Arch
2'0" x 6'-8"	2'-0" x 7'-0"	2'0" x 6'-8"	2'0" x 6'-8"	2'0" x 6'-8"	2'0" x 6'-8"
2'6" x 6'-8"	2'-6" x 7'-0"	2'6" x 6'-8"	2'6" x 6'-8"	2'6" x 6'-8"	2'6" x 6'-8"
2'8" x 6'-8"	2'-8" x 7'-0"	2'8" x 6'-8"	2'8" x 6'-8"	2'8" x 6'-8"	2'8" x 6'-8"
3'0" x 6'-8"	3'-0" x 7'-0"	3'0" x 6'-8"	3'0" x 6'-8"	High-Definition	High-Definition

Adjusta-Fit² Frame

Features:

- 18-gauge Powder Coated Primed Base Frame
- 22-gauge Field Pack w/ 1" of Adjustability
- Smoke & Draft Intumescent Weatherstrip
- 4" x 4" 1/4" Radius Hinges
- Standard Adjustable 2 piece sill
- Deadbolt prep 5 1/2" O.C.

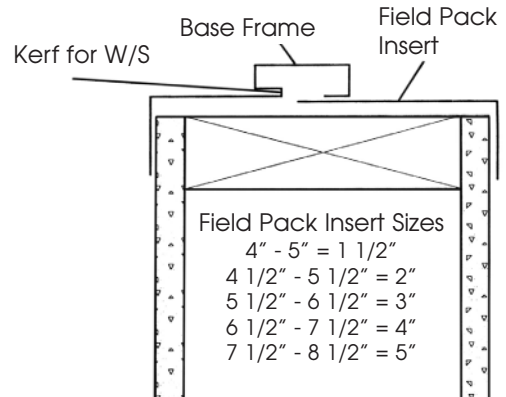

Optional Extras:

- Outswing Sill
- Spring Hinges/ U.L. Listed- Zinc Dichromate (2)
- Deadbolt Prep (2 1/8" facebore)
- Blocking for Panic & Closure (3-0 only, no bore) (3-0 only, no bore)
- 1 Way Viewer

Rough Openings for

Fire Doors in Split-Jamb Frame:

Size	Sill Type	Rough Opening
3'0"	Public Access	37-1/4" x 80-5/8"
2'6"	Standard	31-1/4" x 81-1/4"
2'8"	Standard	33-1/4" x 81-1/4"
3'0"	Standard	37-1/4" x 81-1/4"
	No Sill Version Height - "From Finished Floor"	80-1/8"

Therma-Tru Steel Split-Jamb Door Units - Closure Pack Item Codes

Wall Size	Standard Sill			No Sill			Public Access Sill
	2'-6"	2'-8"	3'-0"	2'-6"	2'-8"	3'0"	3'-0"
4" - 5"	TC402668I	TC402868I	TC403068I		TC402668N		TC403068P
4-1/2" - 5-1/2"	TC452668I	TC452868I	TC453068I	TC452668N	TC452868N	TC453068N	TC453068P
5-1/2" x 6-1/2"		TC552868I	TC553068I			TC553068N	TC553068P
6-1/2" x 7-1/2"	TC652668I	TC652868I	TC653068I			TC653068N	TC653068P
7-1/2" x 8-1/2"			TC753068I				TC753068P
8-1/2" x 9-1/2"			TC853068I				TC853068P


Shaded items are Factory Order (3-4 weeks)

* Stocked at Distributor, Allow 3 Days Delivery


CONSULT LOCAL BUILDING CODES FOR FIRE RATED OPENINGS

THERMA TRU
DOORS
THE DOOR SYSTEM YOU CAN BELIEVE IN


2-6, 2-8 = 2³/₈ BS
3-0 = 2³/₄ BS



TS-100



TS-210



TS-214

Stock

Standard Features for Frame:

- Primed FJ Jamb & Casing
 - Premium Aluminum Sill
 - Weatherstripped
 - 4 x 4 STD Hinges US4
 - 20 Minute Label Frame
 - 4 ³/₄ or 6 ³/₄ Wall Thickness
- These maybe ripped down for narrower jamb requirements.

Options:

- Applied Interior Casings
- Oak Sill
- Oak Threshold
- Aluminum Threshold
- 1 Way Viewer
- 4 x 4 Self Closing Hinges
- Choice of Hardware Color

Rough Openings:

2-6 x 6-8 R.O. 32¹/₂" x 83"
2-8 x 6-8 R.O. 34¹/₂" x 83"
3-0 x 6-8 R.O. 38¹/₂" x 83"
Outswing Units 81¹/₂ HT

Masonite






All Widths
2³/₈ BS

6PNL20MINSM


4PNL20MINSM

2PNL20MINSM


ROMAN



Glenview



Riverside




Cheyenne




2 Panel Arch Top

ROGUE VALLEY
Door


2-6, 2-8 = 2³/₈ BS
3-0 = 2³/₄ BS



4130
6 Panel



4044
4 panel



4082
2 Panel



4055
5 panel

Garage Fire Doors

IRC 309.1

5309.1 Opening protection: Openings from a private garage directly into a room used for sleeping purposes shall not be permitted. Other openings between the garage and dwelling shall be equipped with either solid wood doors not less than 1³/₄ inch (45 mm) in thickness or 20-minute fire-rated doors. Self closing devices and fire resistive rated door frames are not required. All door openings between the garage and the dwelling shall be provided with a raised sill with a minimum height of four inches. Local building codes may require self closing hinges and or fire rated jambs.

Label Affixed to Frame

