


Entrance Door and Patio Door Slope Sill Pan



Order any of 2 ways:

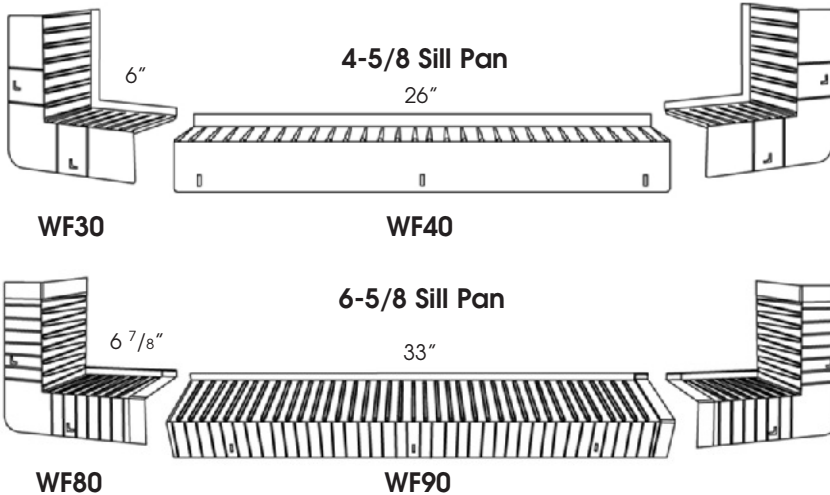

1- To be included w/any exterior door unit or patio unit.

2- **As a kit only**
Specify

- Door Unit Width
- Wall Thickness

CODE=SP

Reason to use:

- Required by most window MFG's to validate their MFG warranties
- ASTM required
- Paragraphs "R703.8 Flashing in the 2006 International Building Code
- Easiest to install
- Does NOT require glue or cement
- Can be installed in cold and wet conditions
- Helps in the prevention of mold
- Easily fits any width opening
- Created by a builder for builders

Key Features:

- Reduced skill requirements - very simple to use
- Green building products - uses recycled materials
- Built-in patented drain channels control water to outside (patent #7059087)
- Durable and flexible
- Allows for shimming
- Least intrusive on installing interior trim
- Size allows it to fold under house wrap

FrameSaver™

Put an end to rot or insect damaged door frames.

- Wood frame with finger jointed wood composite end
- Puts an end to callbacks for rot and insect damaged frames
- Are available for all exterior door systems.
- Machines, sands and finishes like wood.
- Jambs available from 4⁹/₁₆" & 6⁹/₁₆"
- Two coat primer