


Double Hung

Unit Size	21 3/4"	25 3/4"	29 3/4"	33 3/4"	37 3/4"	41 3/4"	67 1/2"	75 1/2"
Rough Oppg.	22 1/4"	26 1/4"	30 1/4"	34 1/4"	38 1/4"	42 1/4"	68"	76"
Unobstructed Glass	15 5/8"	19 5/8"	23 5/8"	27 5/8"	31 5/8"	35 5/8"	27 5/8"	31 5/8"

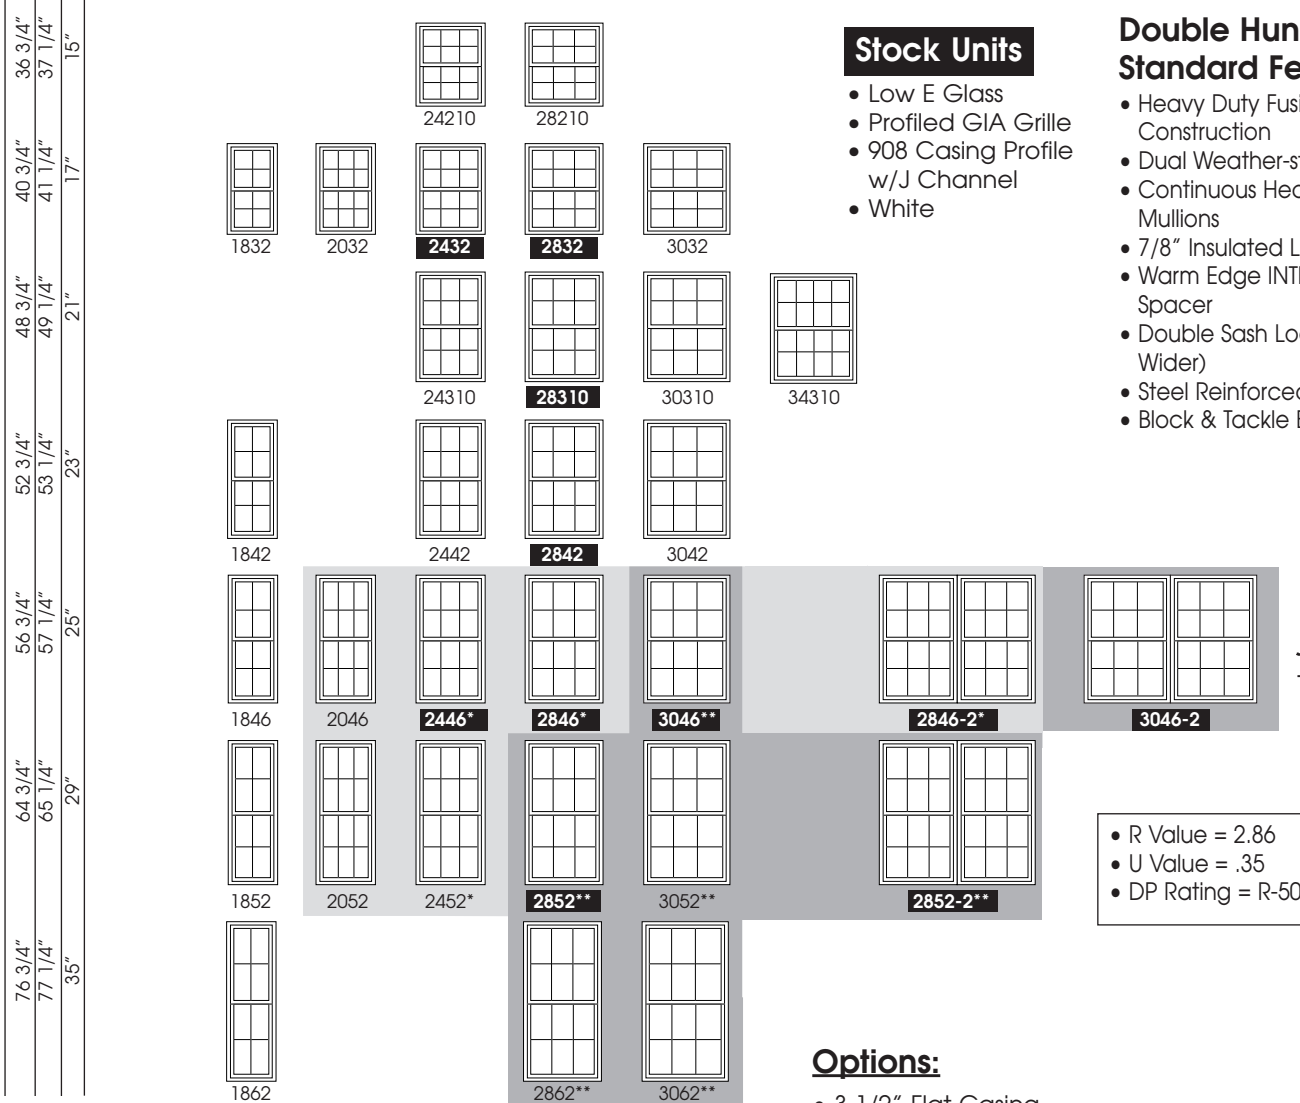

Stock Units

- Low E Glass
- Profiled GIA Grille
- 908 Casing Profile w/J Channel
- White

Double Hung Standard Features:

- Heavy Duty Fusion Welded Construction
- Dual Weather-stripping
- Continuous Head & Sill on Mullions
- 7/8" Insulated Low E Glass
- Warm Edge INTERCEPT Spacer
- Double Sash Locks (34" & Wider)
- Steel Reinforced Lock Rail
- Block & Tackle Balance



- R Value = 2.86
- U Value = .35
- DP Rating = R-50

Options:

- 3 1/2" Flat Casing
- Tempered Glass
- Low E Argon Glass
- Color - Tan
- Applied Extension Jambes for 4 5/8" & 6 5/8"
- Other Extension Jamb Sizes Available


Call Size	Mullion	Triple
18	44"	65 3/4"
20	52"	77 3/4"
24	60"	89 3/4"
28	68"	101 3/4"
30	76"	113 3/4"
34	84"	—

To determine R.O.'s for combinations
Add unit dimension for each unit and add 1/2". R.O. is 1/2" greater than tip to tip dimension

* Denotes Mass Egress — Lt gray 3.3 SF

** Denotes ME, NH BOCA Egress — Dk gray 5.7 SF

5800 Series Patio Sliders

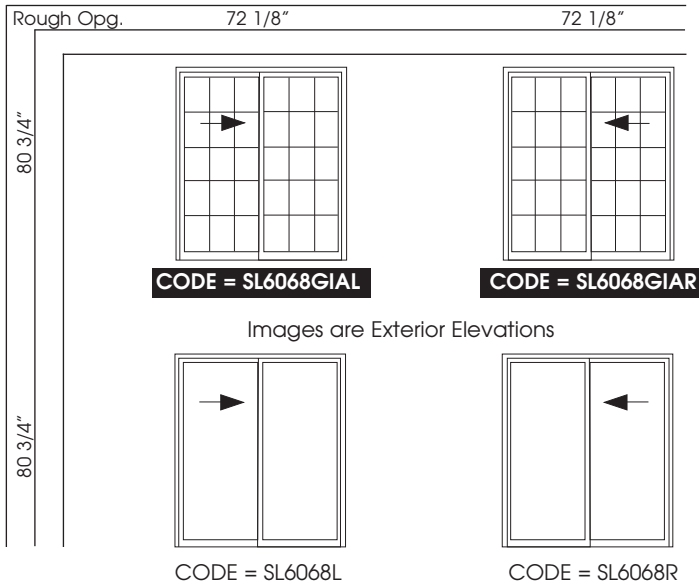

Handing viewed from exterior
F = Fixed A = Active

Patio Slider Screen Code = SL3068SCRN

6-0 x 6-8 Patio Sliders

Standard Features:


- White
- 7/8" Insulated Glass LoE2 Glass
- Self Leveling Ball Bearing Rollers
- Integral 'J' Channel & Nailing Flange
- Steel Reinforced Panel
- Four Corner Welded Frame
- Multi-Point Lock
- White Handle Set
- Profile GIA Grille



- R Value = 3.03
- U Value = .33
- DP Rating = R-40

OPTION:
Color: • Tan

Casement

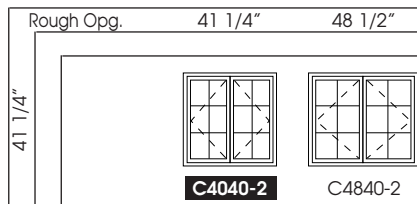

Stock Units

- Low E Glass
- Profiled GIA Grille
- 908 Casing Profile w/J Channel
- White



Casement

Standard Features:

- Heavy Duty Fusion Welded Construction
- Dual Weather-stripping
- Continuous Head & Sill on Mullions Units
- 7/8" Insulated Low E Glass
- Warm Edge INTERCEPT Spacer
- Multi-Point Locking System

- R Value = 2.94
- U Value = .34
- DP Rating = R-50

Options:

- 3 1/2" Flat Casing
- Tempered Glass
- Low E Argon Glass
- Color - Tan
- Applied Extension Jambes for 4 5/8" & 6 5/8"
- Other Extension Jamb Sizes Available